

AUTROSAFE 4

A new level in interactive fire detection systems

Autronica Fire and Security AS





PROVEN, RELIABLE AND NOW EVEN BETTER



AUTROSAFE 4

- the next generation in fire safety

Our task was demanding, yet simple: Take the best fire safety system around and make it even better. The new and improved AutroSafe 4 is designed for the toughest requirements and expands the possibilities of a fire detection system even further. From hotels to cruise ships to drilling platforms, AutroSafe 4 delivers the most rigorous fire safety yet.

Autronica Fire and Security launched AutroSafe, our high-end fire detection system, in 1999. From day one, AutroSafe has proven its unique stability and reliability in more than 15 000 installations worldwide, both on- and offshore.

AutroSafe 4 provides advanced functionality for a wide range of applications. The system is designed to meet all requirements in the high-

end segment of the onshore, maritime and offshore market, and is certified according to European directives (CPD) requiring EN 54 compliance. Factory Mutual (FM) approval according to NFPA 72.

Reliable communication is paramount to your safety. That's why we're adding AutroNet to the AutroSafe system, an innovative network solution safeguarding communication between panels. AutroNet ensures a redundant and high-speed network expanding the reach of the AutroSafe system even further.

History proves you can rely on AutroSafe. All existing functionality has stood up to the toughest tests worldwide for more than 10 years. With AutroSafe 4, Autronica has once again taken fire safety to a higher level.

"AutroSafe 4 delivers the most rigorous fire safety yet"



FROM SECURE TO DOUBLE SECURE

- introducing AutroKeepers that provide dual reporting of events

AutroSafe 4 provides the highest degree of security yet by combining safety, reliability and availability.

At the basic level, the sensor units are connected in two-wired loops. Consequently, in case of a single broken or shorted loop, connection with all units is maintained. Additionally, two Autro Keeper (patent pending) units per loop make redundant control of the loop possible. This is particularly important since, should the primary loop controlling panel fail or misbehave, the secondary backup panel will take control of the loop.

AutroKeepers are smart relay units that are connected to the loop, controlling a panel's access to it. They may operate in automatic, semi automatic or manual modes. The AutroKeeper makes it possible to communicate with loop units, using a secondary panel in addition to the primary one. This ensures that an alarm event is not lost in case of system node or network failure.

AutroSafe 4 is certified according to European directives (CPD) requiring EN 54 compliance.

Built to deliver a higher degree of safety

- All loop units have a short-circuit isolator no need for extra loop units
- Loops are powered from both sides ensuring redundant loop network
- AutroSafe SelfVerify® monitors each detector and manual call point every day
- Two Autrokeepers ensure that no events are lost in case of system node or network failure
- Dual network between all panels secures redundant panel network
- Dual connections to system integrators

SELFVERIFY

- improved safety through automated testing and maintenance

When launched in 1999, AutroSafe SelfVerify® was the premium technology enabling fire detection systems to test themselves. It still is.

"Quite possibly the safest

and most reliable fire safety

system available – ensuring

optimal detection"

The necessity of reducing high maintenance costs and increasing fire security, encouraged Autronica to invest considerable time and effort in developing this unique technology.

Over the last decade it has proven its worth in over 15 000 applications in onshore, offshore and maritime installations.

AutroSafe SelfVerify® solves all issues of manual maintenance, leaving time consuming and costly physical testing no longer necessary. With AutroSafe SelfVerify®,

the system checks all detectors, interfaces, connections and cables – from detector chamber to alarm output – every single day.

The self-testing system

Most fire detection systems depend on costly and often irregular manual inspections, which involve a number of challenges and problems:

- Detectors may be out of reach
- Service engineers may not have access to particular areas
- Manual testing with gas or smoke is not reliable
- Test gas or smoke is rarely used in calibrated quantities
- Even a faulty detector will eventually react if its chamber is filled with enough smoke
- Excessive and irregular intervals between manual tests of detectors, leaving damaged detectors unnoticed for far too long

Not only does the system test whether a detector is capable of provoking an alarm, it even verifies the sensitivity of every detector with a calibrated signal. The SelfVerify system ensures that each detector always responds to the correct alarm level. In the event of irregularities, the display on the operating panel will accurately pinpoint the source of any problem.

AutroSafe SelfVerify® is developed for worldwide standards and regulations, and the detectors are certified according to European directives (CPD) requiring EN 54 compliance.

AutroSafe SelfVerify® ensures that you have the safest and most reliable fire safety system available – a system ensuring optimal detection.



MAXIMUM CAPACITY. MINIMUM DOWNTIME.



THE NEW AUTROSAFE 4

- one point access


AutroSafe 4 is managed through a single point of operation for download of configuration data or program upgrades. This ensures a faster and safer way to change or upgrade the system program, using the panel network, AutroNet or a USB memory stick. Minimum downtime, through quick and easy commissioning.

LARGE CAPACITY

- without compromising security

Our Ethernet-based panel network, AutroNet, connects the different panels through a high-speed (100Mbps) redundant system. Delivering solid, reliable performance in line with current regulations.

- 64 fire alarm panels
- 15 000 loop units connected to one system
- 6 detector loops per panel
- 127 loop units connected to one detector loop
- 15 loop units connected to one PowerLoop
- 31 loop units connected to AutroField Bus
- Event log with up to 10 000 events

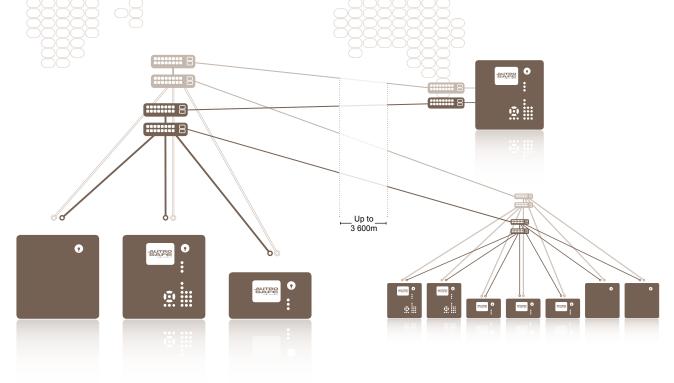

INTEGRATED 3RD PARTY INTERFACE

- granting unlimited communication options

AutroSafe 4 communicates with equipment using the following protocols

- ESPA 4.4.4 allowing connectivity with devices such as AutroTel alarm routing via telephone networks and pocket paging systems
- NMEA-0183 allowing connectivity with devices such as the maritime Voyage Data Recorder (VDR)
- MODBUS allowing connectivity with Programmable Logic Controllers (PLC)
- AutroCom allowing interface to control and monitoring systems (AutroMaster)

AutroSafe 4 includes the following communication ports

- 2 Ethernet ports for AutroNet, AutroCom and configuration data/system software upgrade
- 1 AL_Com+ port (interfacing loop drivers and I/O units)
- 1 RS-232, RS-422 or RS-485 (AutroCom/ESPA4.4.4/MODBUS/VDR)
- 1 AutroFieldBus interface
- 2 USB host ports for printer/USB memory stick
 (configuration data and system software upgrade)
- FailSafe relay output

CLEAN DESIGN AND PERFORMANCE

- balancing intuitive user interface with high technology

During normal operation, the power indicator will always display a steady green light when the power is ON. No disrupting or unnecessary information is shown, only indicators relevant to the actual condition are visible.

IMPROVED FLEXIBILITY

- adjustable to any environment

You can change multi detector operation class, adjust a single detector or a group of detectors or operate class switch for a period of time.

PROVEN LOOP UNITS

- a wide range for any application

All types and series of AutroSafe detectors, manual call points, I/O units and sounders can operate on the same detection loop.






INTRODUCING AUTRONET


- a new standard in reliable data and information transmission

To provide maximum dependability, Autronica has developed AutroNet – a dual path transmission network based on a high-bandwidth Ethernet network (100Mbps) suitable for safety-critical systems.

AutroNet secures the transmission of data and information even if a line fault (break, switch port fault etc.) is present. Any alarms are transmitted safely to all panels because all network traffic is duplicated along two independent network paths.

The unique combination of AutroNet and AutroSafe results in a flexible and reliable system which is easy to maintain, modify and expand.

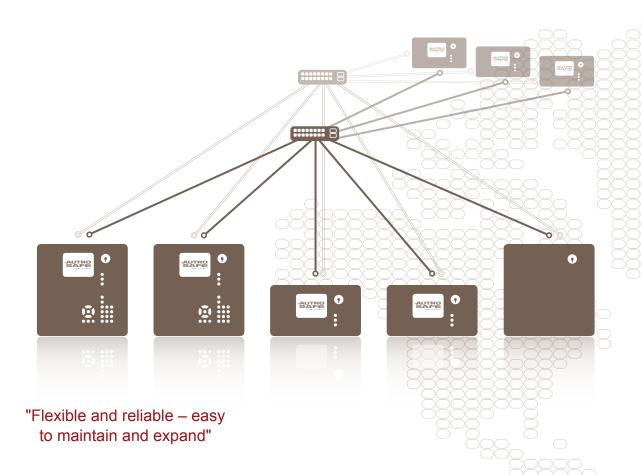

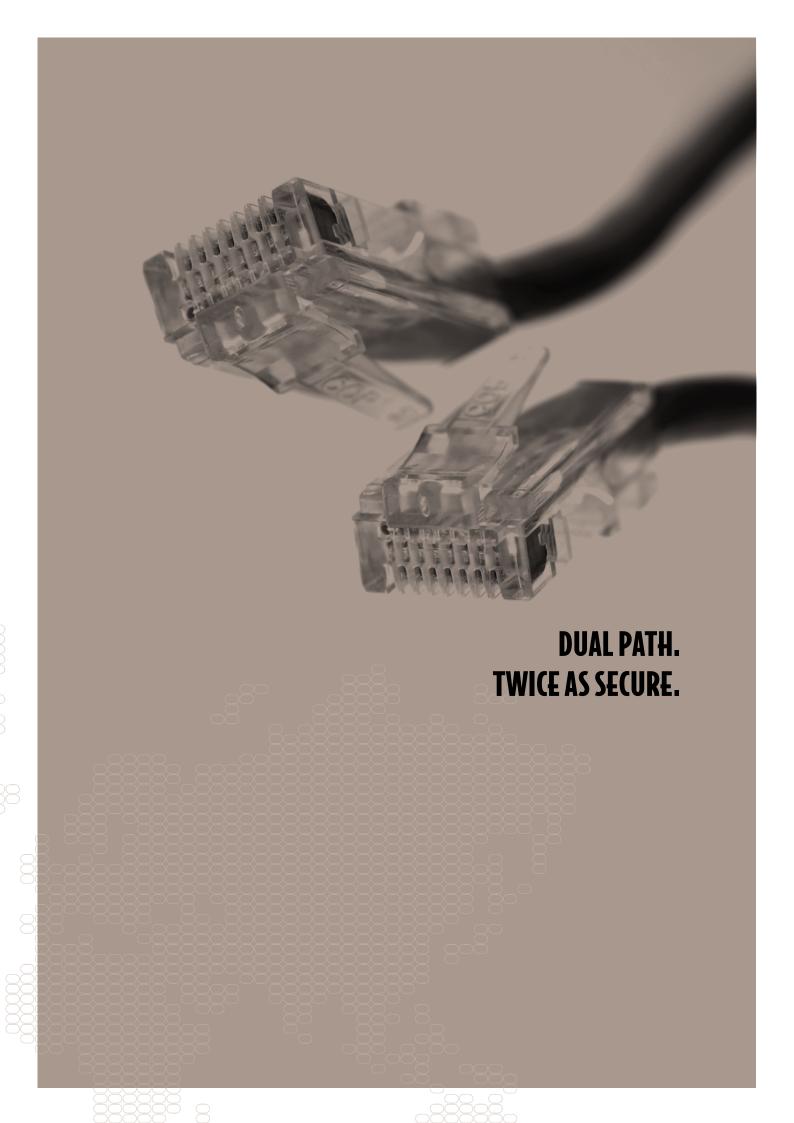



making sure you're in control

AutroMaster ISEMS is an Integrated Safety and Emergency Management System combining the strengths of a powerful fire detection system with control and monitoring functions dedicated to make sure you are in control in case of an emergency.

Graphical user interface

The AutroMaster provides an intuitive control and monitoring interface built to save valuable time when every second counts.

Status information is displayed in real-time with easy-to-understand graphical representation.

Navigation is fast and instinctual and the powerful zoom functions allow you to monitor all areas in great detail.

AutroMaster displays values for gas density, smoke and heat in dynamic colours, making it easy to perform the necessary actions during emergencies.

Interoperability


Control and monitoring of third party systems can easily be performed via serial protocols or network interfaces. They provide connection to basically any source – network time servers, telephone systems for text messaging, public address systems for automated voice messaging, emergency lights, access control systems, CCTV, automation systems and so on.

Logging and reporting

The AutroMaster keeps track of all events in the system and has a built-in report generator. This provides a cost-effective system log for maintenance and documentation purposes.

Decision-making tools

In high-risk environments around the world, a seemingly innocuous fire can quickly escalate into an emergency of large proportions. When disaster strikes and you only have seconds to make the proper decisions, the right safety and emergency management system is an invaluable asset. The AutroMaster includes a Decision Support System (DSS) that will help you make the right decisions at the right time.

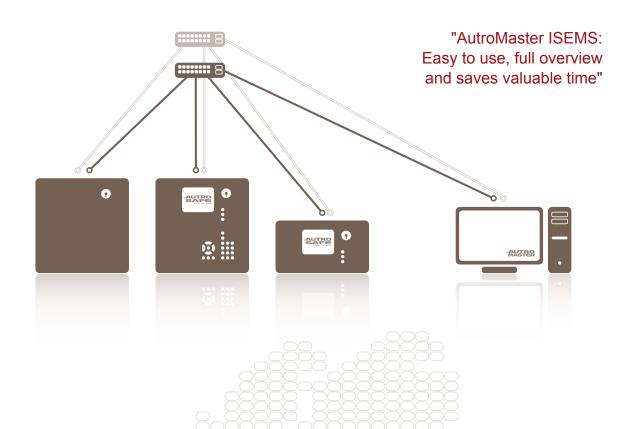

OPC SERVER

- for complete integration

With the AutroSafe OPC server, we accomodate for communication between fire detection systems and controlling emergency systems. This way we have increased the interoperability between our system and 3rd party supervisory systems.

The AutroSafe OPC server provides a standard OPC interface for the AutroSafe integrated fire detection system. OPC (OLE for Process Control) is a software standard issued by Windows-based applications to access data from process control systems. The basic principle of OPC is that OPC client applications communicate with an OPC server via a standardized, open and vendor-independent interface.

AUTRONICA FIRE AND SECURITY

- a leading innovator of safety

Autronica Fire and Security is a leading innovator, manufacturer and supplier of fire safety equipment. Our products ensure safety in applications on land and sea worldwide. The company is owned by United Technologies Corporation (UTC) and employs more than 370 people with great skill and experience in the developing, manufacturing and marketing of fire safety equipment. Autronica Fire and Security is an international company based in Trondheim, a dynamic city known as the technological hotspot of Norway.

7483 Trondheim Norway ■ Tel: +47 73 58 25 00 ■ Fax: +47 73 58 25 01 ■ E-mail: info@autronicafire.no ■ www.autronicafire.com Org.nr.: NO 979 975 503 (MVA/VAT)